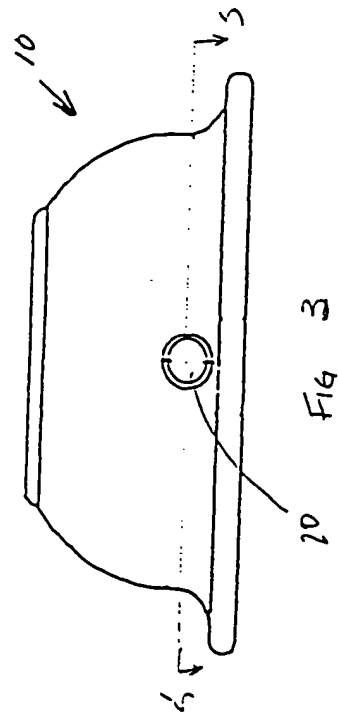
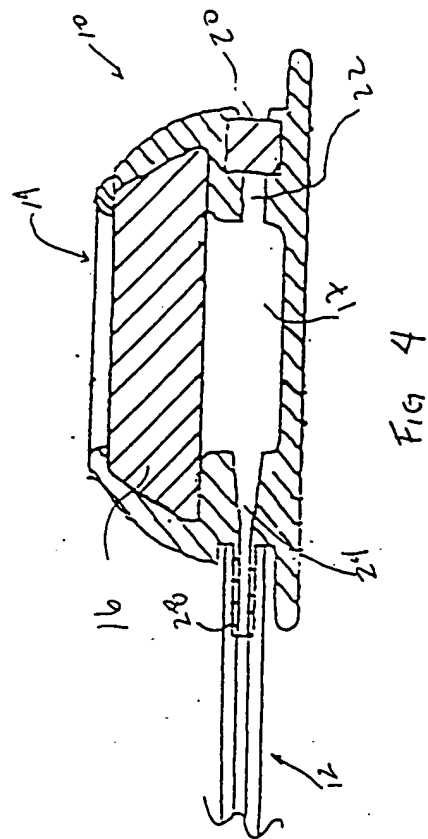
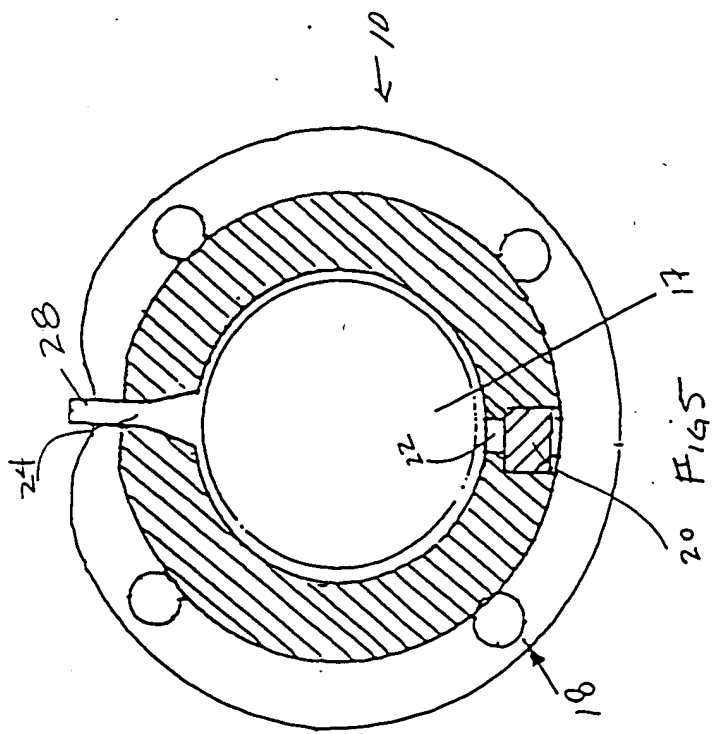
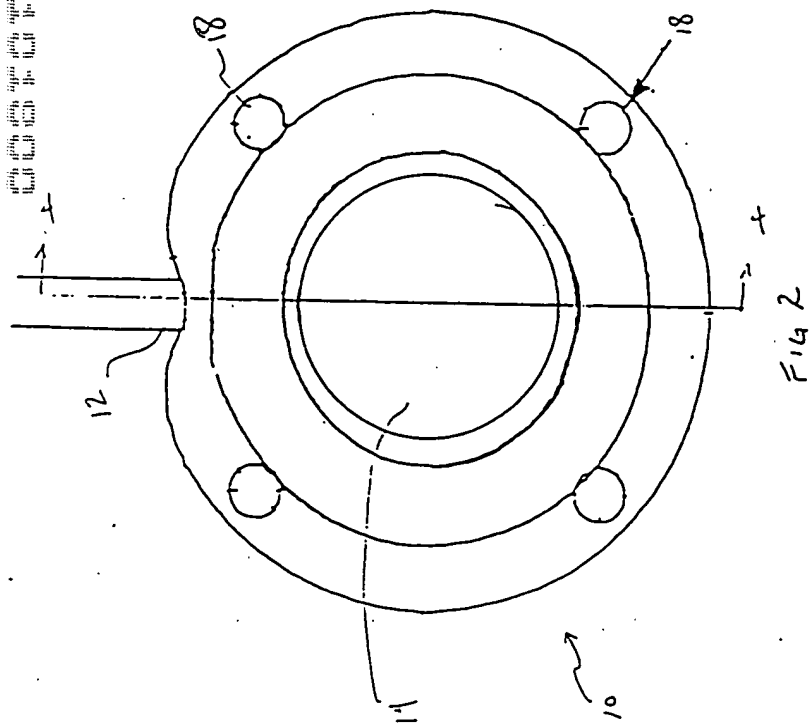


Fig 1
Prior Art



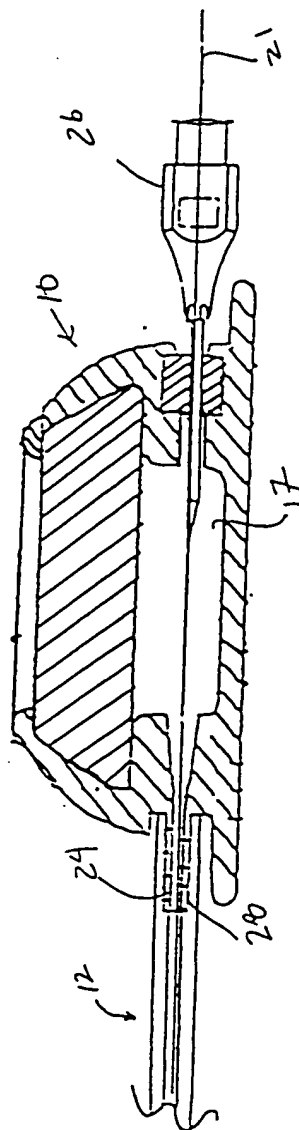


FIG. 6

U.S. Pat. No. 4,000,000

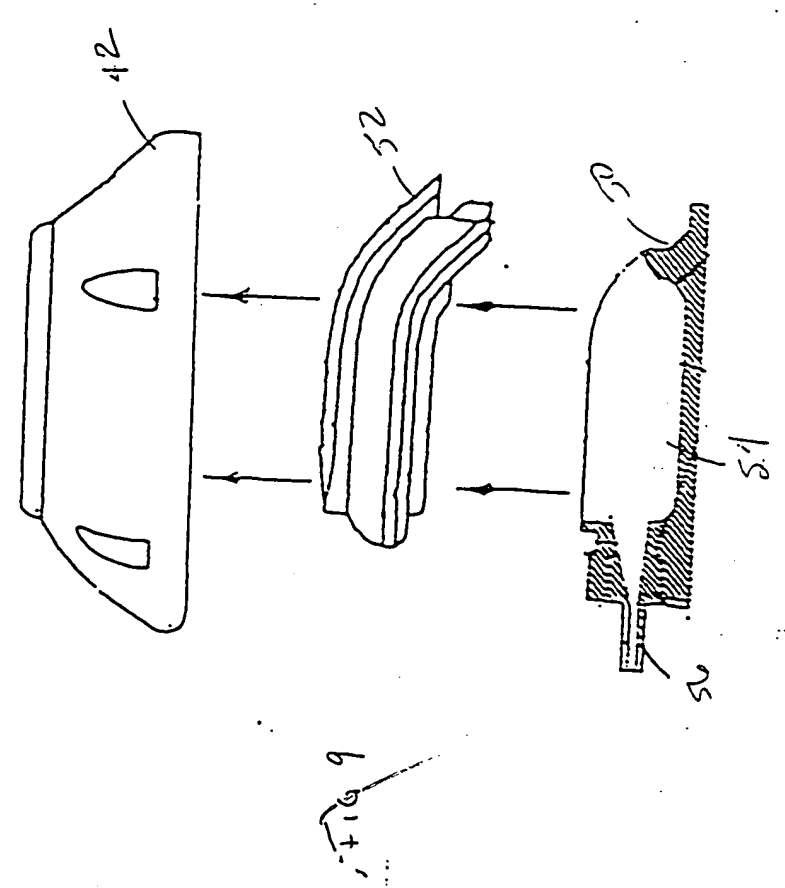
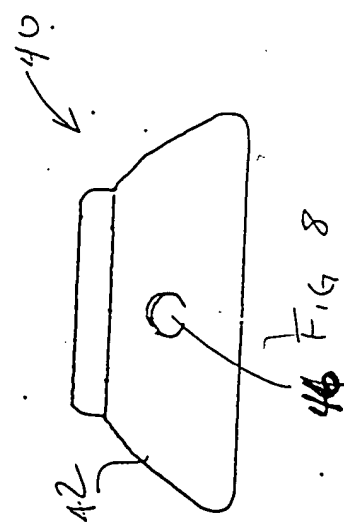
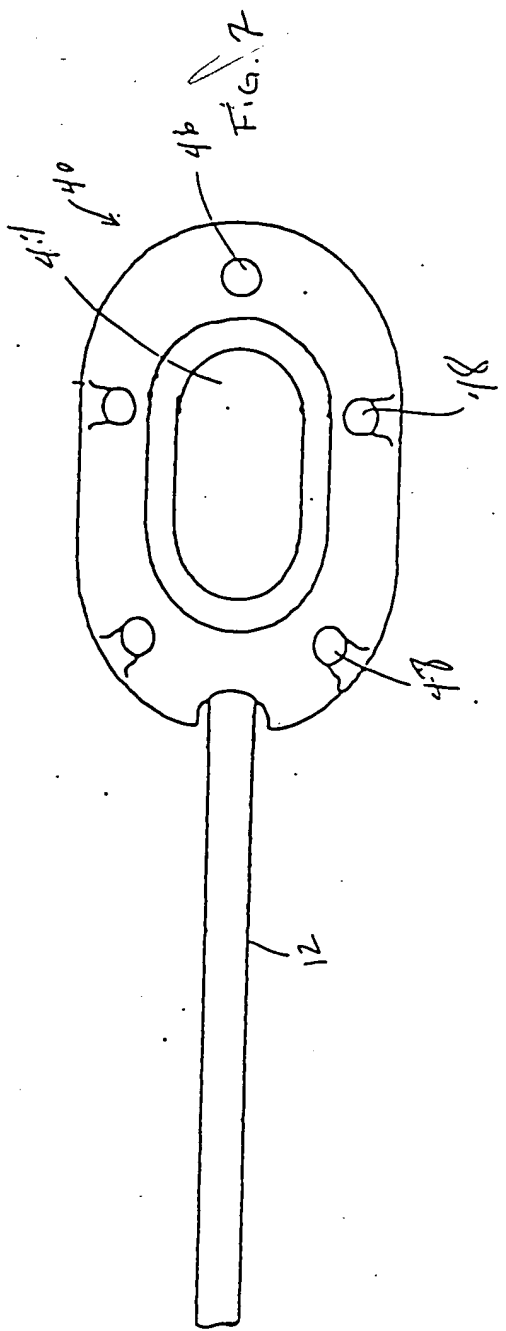


FIG. 10 is a cross-sectional view of the device of FIG. 1, taken along the line 10-10 of FIG. 1, showing the device in a closed position. The device includes a housing 10, a piston 12, a spring 14, and a valve 16. The piston 12 is in contact with the valve 16, and the spring 14 is compressed between the piston 12 and the housing 10. The valve 16 is in a closed position, preventing fluid flow from the inlet 18 to the outlet 20.

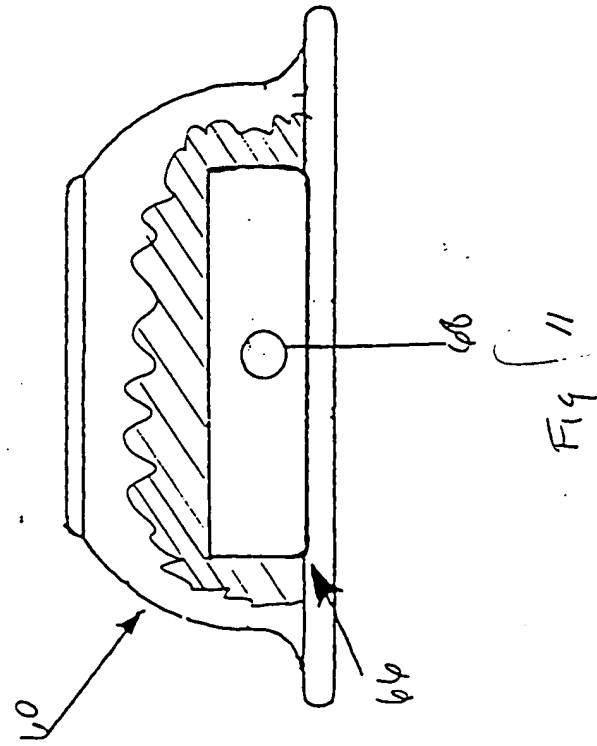
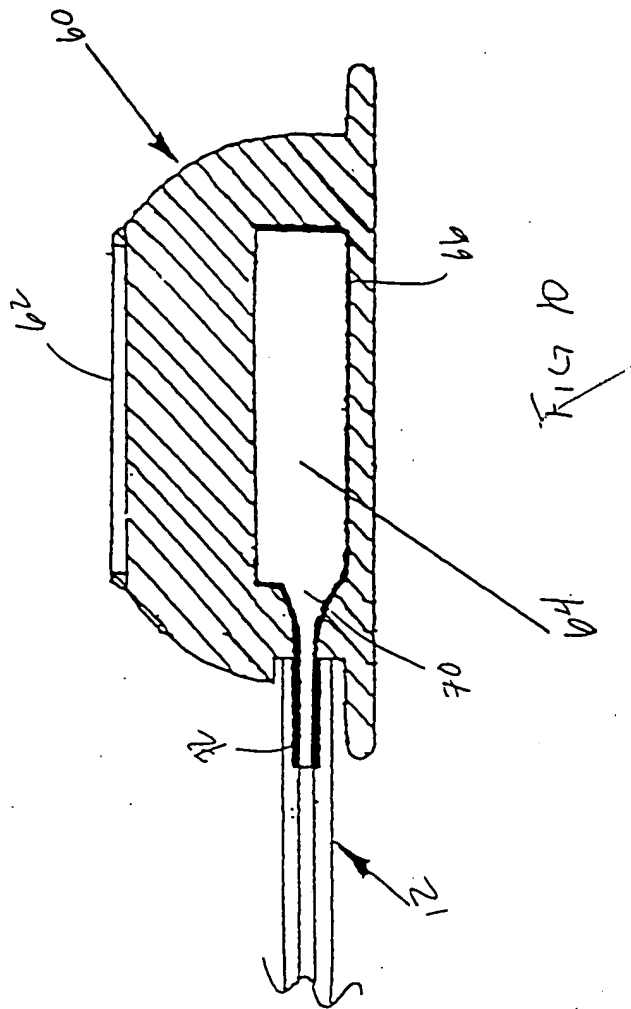
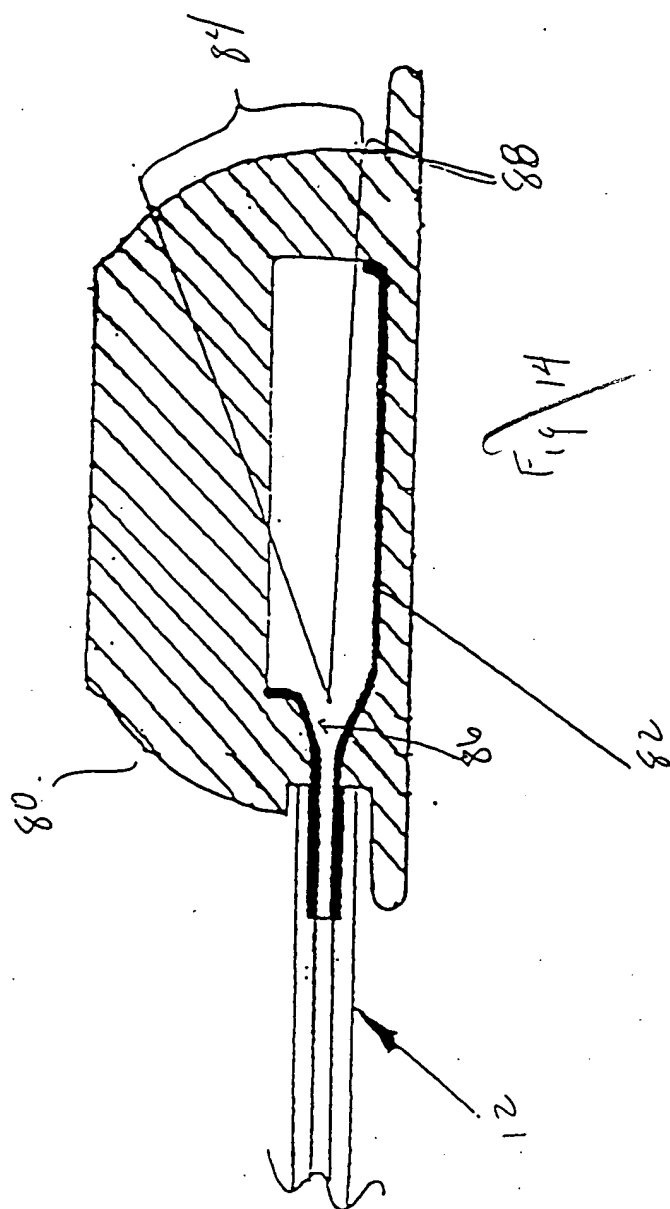
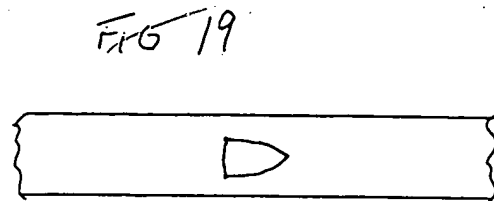
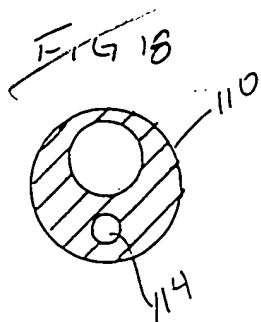
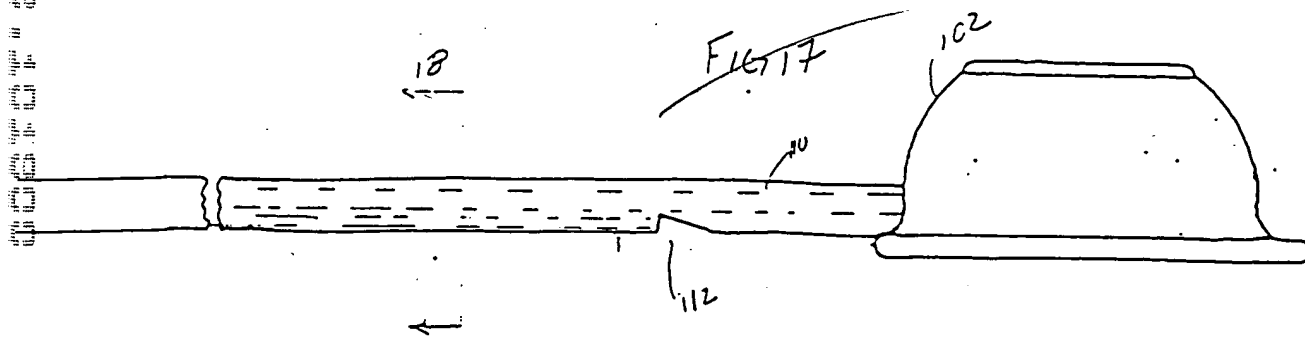
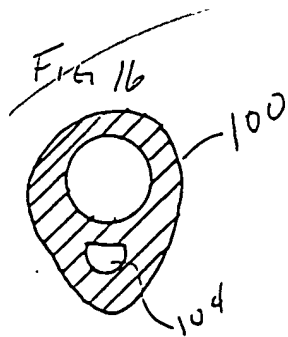
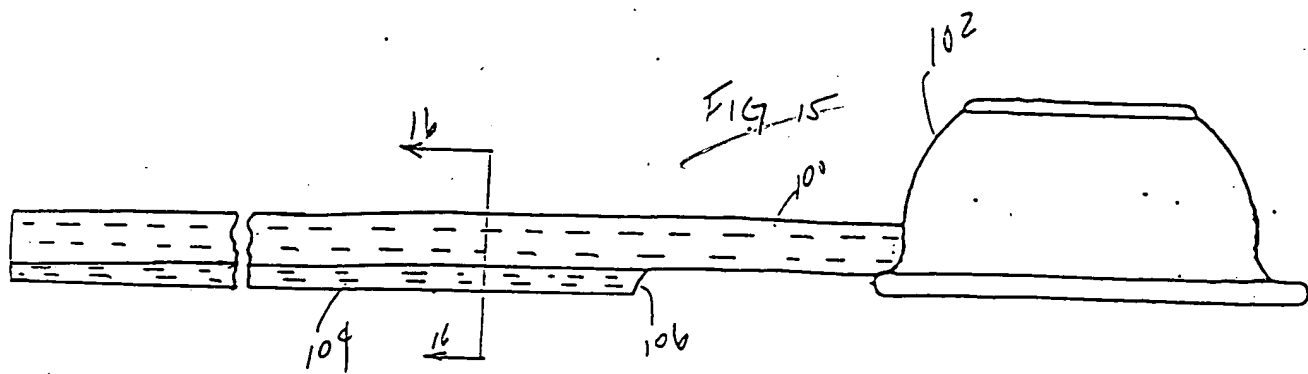


FIG. 14





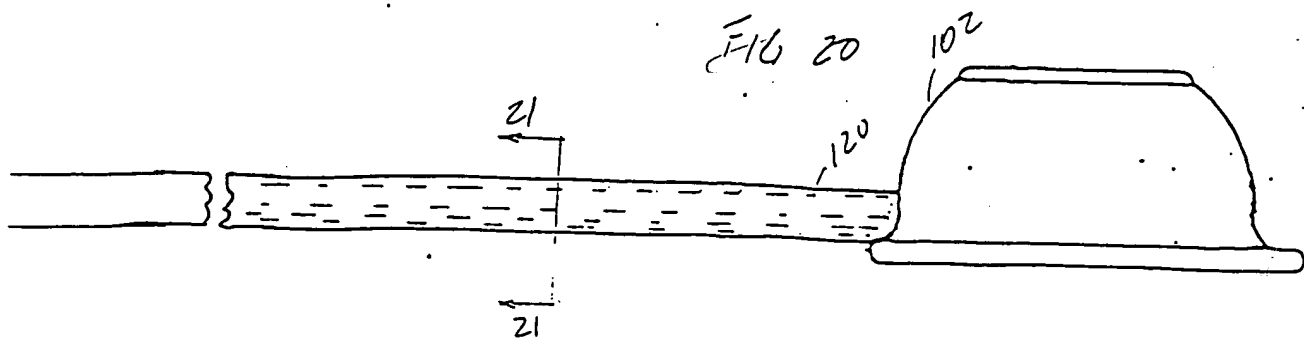


FIG-21


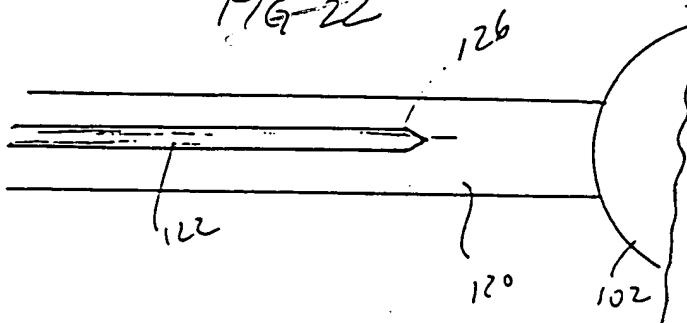


FIG-22



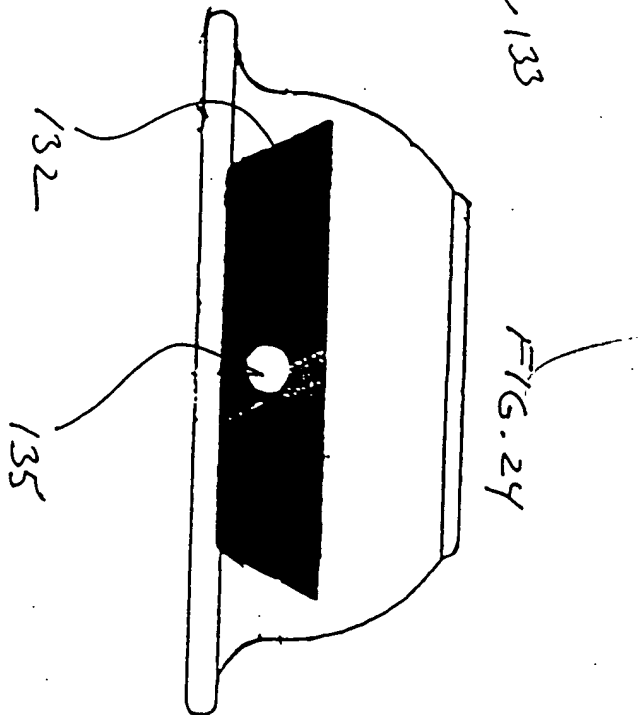
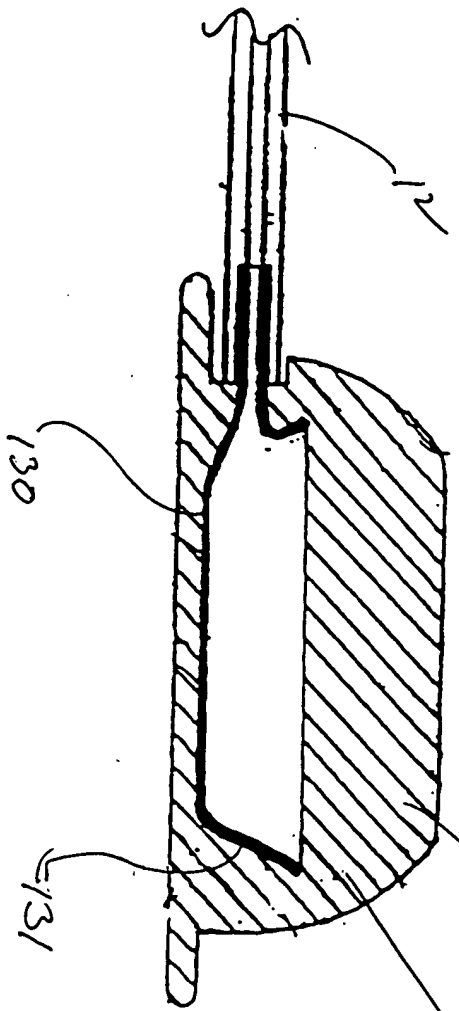


Fig. 25

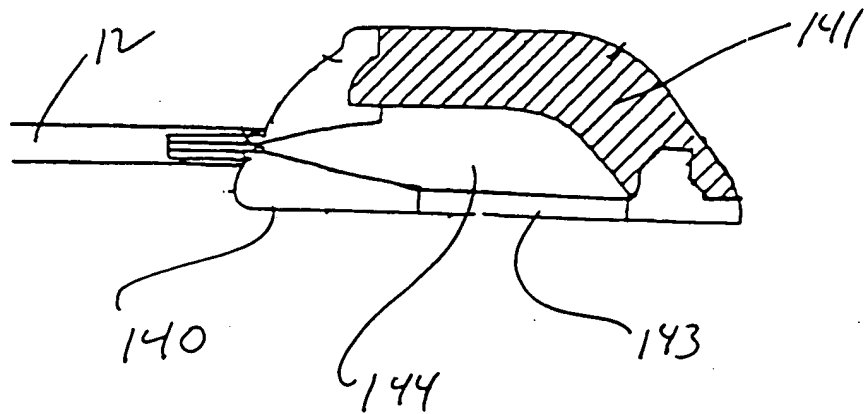
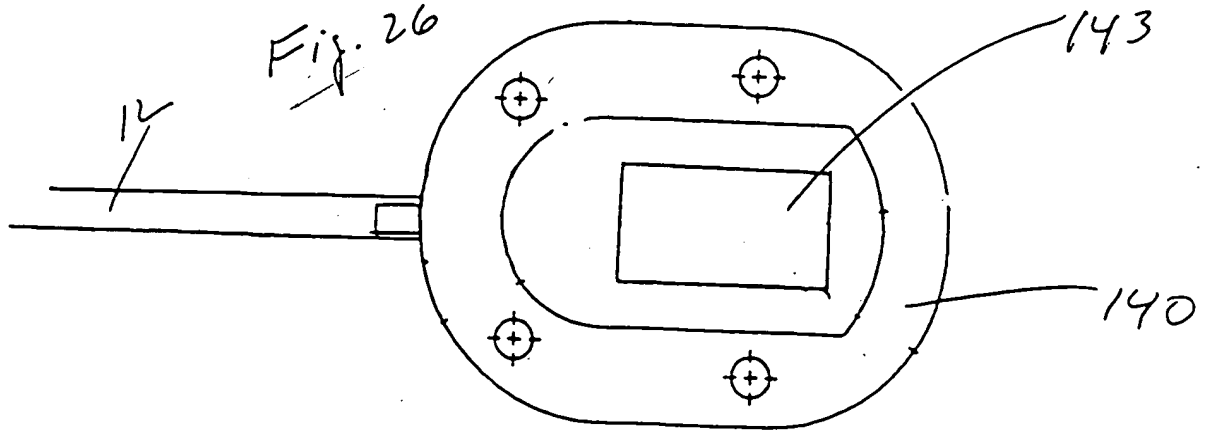


Fig. 26



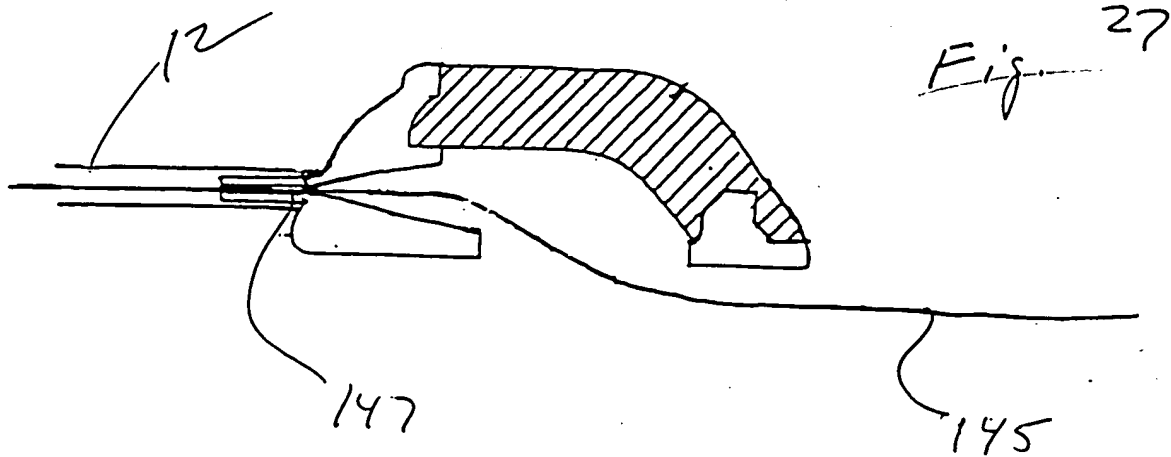


FIG. 28

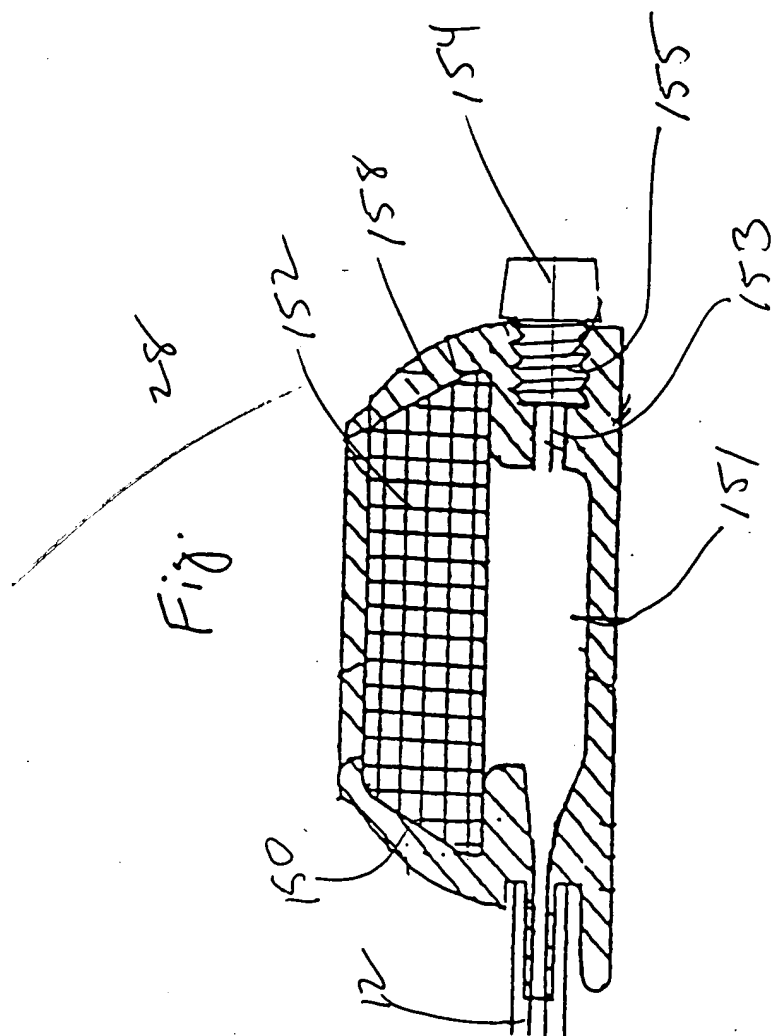


Fig. 29

